


# RCCN 日成GDRF型环保阻燃线槽 Wide Slot Wiring Duct



产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。  
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。  
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。  
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。  
 颜色:灰色.白色.蓝色.黑色(可定制其它颜色,有起订量要求)  
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。  
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。  
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。  
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。  
 3.出线孔低、组合容易、拆卸简单、易于配线。


**更多选择:量大可按需求生产所需规格或定制长度.例:GDR8080F(L=1.7M)**  
 Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.  
 Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC  
 Work temperature:-40 °c to 65 °c  
 UL94 Flammability Rating of V-0  
 Provided with mounting holes  
 Available color:gray.white.blue.black and other special colors  
**Special length come with MOQ request**

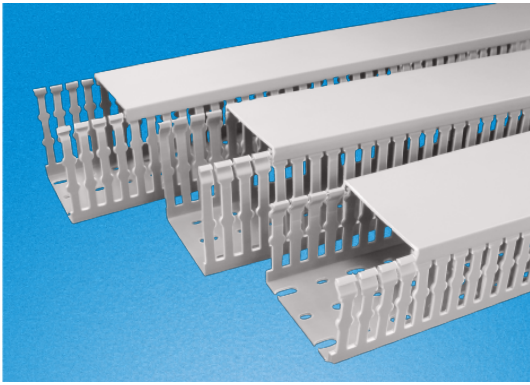

推荐:灰色为常规库存产品,其它颜色有起订量要求。

Comment: gray is the common color, other color need more MOQ

GDR6060F/4.5\*5.5 参考C72平面图

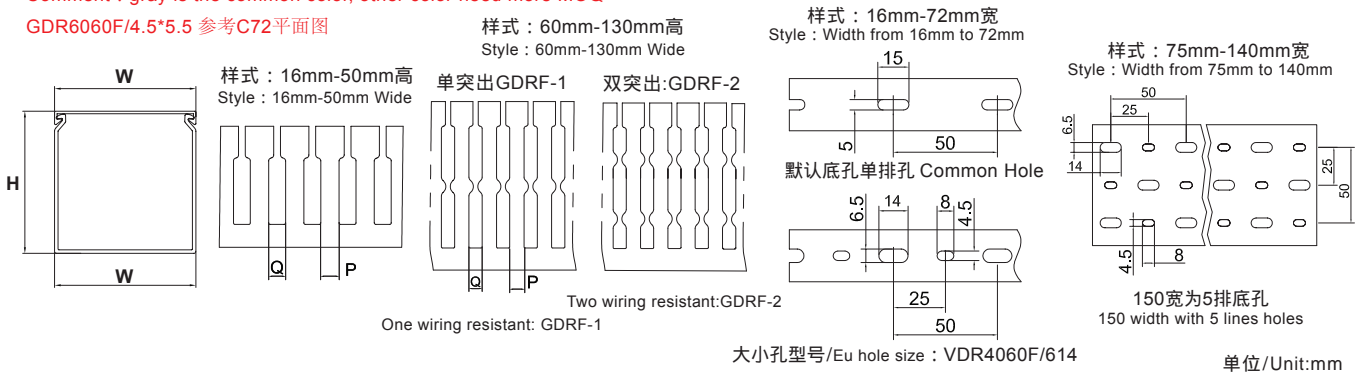


型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005	20×25	6	6.5	5~15pcs	每支 2米  含槽底槽盖  Pcs/ranch 2M
GDR2025F	GDR2025FW	GDR2025FE	GDR2025FB	25×25	6	6.5	10~25pcs	
GDR2525F	GDR2525FW	GDR2525FE	GDR2525FB	30×25	6	6.5	12~28pcs	
GDR3025F	GDR3025FW	GDR3025FE	GDR3025FB	40×25	6	6.5	20~35pcs	
GDR4025F	GDR4025FW	GDR4025FE	GDR4025FB	50×25	6	6.5	25~40pcs	
GDR2540F	GDR2540FW	GDR2540FE	GDR2540FB	25×40	6	6.5	20~25pcs	
GDR3540F	GDR3540FW	GDR3540FE	GDR3540FB	35×40	6	6.5	50~60pcs	
GDR4040F	GDR4040FW	GDR4040FE	GDR4040FB	40×40	6	6.5	60~70pcs	
GDR6040F	GDR6040FW	GDR6040FE	GDR6040FB	60×40	6	6.5	100~115pcs	
GDR8040F	GDR8040FW	GDR8040FE	GDR8040FB	80×40	6	6.5	120~135pcs	
GDR10040F	GDR10040FW	GDR10040FE	GDR10040FB	100×40	6	6.5	120~135pcs	

# RCCN 日成GDRF型环保阻燃线槽 Wide Slot Wiring Duct

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
GDR2560F1	GDR2560F1W	GDR2560F1E	GDR2560F1B	25×60	6	6.5	40~50pcs	每支 2米  含槽底槽盖
GDR3060F1	GDR3060F1W	GDR3060F1E	GDR3060F1B	30×60	6	6.5	60~80pcs	
GDR3560F1	GDR3560F1W	GDR3560F1E	GDR3560F1B	35×60	6	6.5	90~105pcs	
GDR4060F1	GDR4060F1W	GDR4060F1E	GDR4060F1B	40×60	6	6.5	100~115pcs	
GDR4560F1	GDR4560F1W	GDR4560F1E	GDR4560F1B	45×60	6	6.5	110~120pcs	
GDR5060F1	GDR5060F1W	GDR5060F1E	GDR5060F1B	50×60	6	6.5	120~135pcs	
GDR6060F1	GDR6060F1W	GDR6060F1E	GDR6060F1B	60×60	6	6.5	120~135pcs	
GDR8060F1	GDR8060F1W	GDR8060F1E	GDR8060F1B	80×60	6	6.5	180~210pcs	
GDR10060F1	GDR10060F1W	GDR10060F1E	GDR10060F1B	100×60	6	6.5	240~290pcs	
GDR11060F1	GDR11060F1W	GDR11060F1E	GDR11060F1B	110×60	6	6.5	250~300pcs	
GDR12060F1	GDR12060F1W	GDR12060F1E	GDR12060F1B	120×60	6	6.5	260~320pcs	Pcs/Branch 2M  Including tuning and lids
GDR2580F1	GDR2580F1W	GDR2580F1E	GDR2580F1B	25×80	6	6.5	100~6.50pcs	
GDR3080F1	GDR3080F1W	GDR3080F1E	GDR3080F1B	30×80	8	6.5	110~6.55pcs	
GDR3580F1	GDR3580F1W	GDR3580F1E	GDR3580F1B	35×80	6	6.5	110~130pcs	
GDR4080F1	GDR4080F1W	GDR4080F1E	GDR4080F1B	40×80	6	6.5	140~160pcs	
GDR4580F1	GDR4580F1W	GDR4580F1E	GDR4580F1B	45×80	6	6.5	140~160pcs	
GDR5080F1	GDR5080F1W	GDR5080F1E	GDR5080F1B	50×80	6	6.5	160~180pcs	
GDR5580F1	GDR5580F1W	GDR5580F1E	GDR5580F1B	55×80	6	6.5	160~180pcs	
GDR6080F1	GDR6080F1W	GDR6080F1E	GDR6080F1B	60×80	6	6.5	180~210pcs	
GDR8080F1	GDR8080F1W	GDR8080F1E	GDR8080F1B	80×80	6	6.5	240~290pcs	
GDR10080F1	GDR10080F1W	GDR10080F1E	GDR10080F1B	100×80	6	6.5	260~350pcs	每支 2米  含槽底槽盖
GDR12080F1	GDR12080F1W	GDR12080F1E	GDR12080F1B	120×80	6	6.5	280~380pcs	
GDR14080F1	GDR14080F1W	GDR14080F1E	GDR14080F1B	140×80	6	6.5	350~450pcs	
GDR2580F2	GDR2580F2W	GDR2580F2E	GDR2580F2B	25×80	6	6.5	100~6.50pcs	
GDR3080F2	GDR3080F2W	GDR3080F2E	GDR3080F2B	30×80	6	6.5	110~6.55pcs	
GDR3580F2	GDR3580F2W	GDR3580F2E	GDR3580F2B	35×80	6	6.5	110~130pcs	
GDR4080F2	GDR4080F2W	GDR4080F2E	GDR4080F2B	40×80	6	6.5	140~160pcs	
GDR4580F2	GDR4580F2W	GDR4580F2E	GDR4580F2B	45×80	6	6.5	140~160pcs	
GDR5080F2	GDR5080F2W	GDR5080F2E	GDR5080F2B	50×80	6	6.5	160~180pcs	
GDR5580F2	GDR5580F2W	GDR5580F2E	GDR5580F2B	55×80	6	6.5	160~180pcs	
GDR6080F2	GDR6080F2W	GDR6080F2E	GDR6080F2B	60×80	6	6.5	180~210pcs	Pcs/Branch 2M  Including tuning and lids
GDR8080F2	GDR8080F2W	GDR8080F2E	GDR8080F2B	80×80	6	6.5	240~290pcs	
GDR10080F2	GDR10080F2W	GDR10080F2E	GDR10080F2B	100×80	6	6.5	260~350pcs	
GDR12080F2	GDR12080F2W	GDR12080F2E	GDR12080F2B	120×80	6	6.5	280~380pcs	
GDR14080F2	GDR14080F2W	GDR14080F2E	GDR14080F2B	140×80	6	6.5	350~450pcs	
GDR25100F2	GDR25100F2W	GDR25100F2E	GDR25100F2B	25×100	6	6.5	110~160pcs	
GDR33100F2	GDR33100F2W	GDR33100F2E	GDR33100F2B	33×100	6	6.5	130~165pcs	
GDR40100F2	GDR40100F2W	GDR40100F2E	GDR40100F2B	40×100	6	6.5	130~175pcs	
GDR50100F2	GDR50100F2W	GDR50100F2E	GDR50100F2B	50×100	6	6.5	220~250pcs	
GDR60100F2	GDR60100F2W	GDR60100F2E	GDR60100F2B	60×100	6	6.5	240~290pcs	
GDR70100F2	GDR70100F2W	GDR70100F2E	GDR70100F2B	75×100	6	6.5	260~350pcs	
GDR80100F2	GDR80100F2W	GDR80100F2E	GDR80100F2B	80×100	6	6.5	260~350pcs	
GDR100100F2	GDR100100F2W	GDR100100F2E	GDR100100F2B	100×100	6	6.5	300~400pcs	

# RCCN 日成GDRF型环保阻燃线槽 Wide Slot Wiring Duct

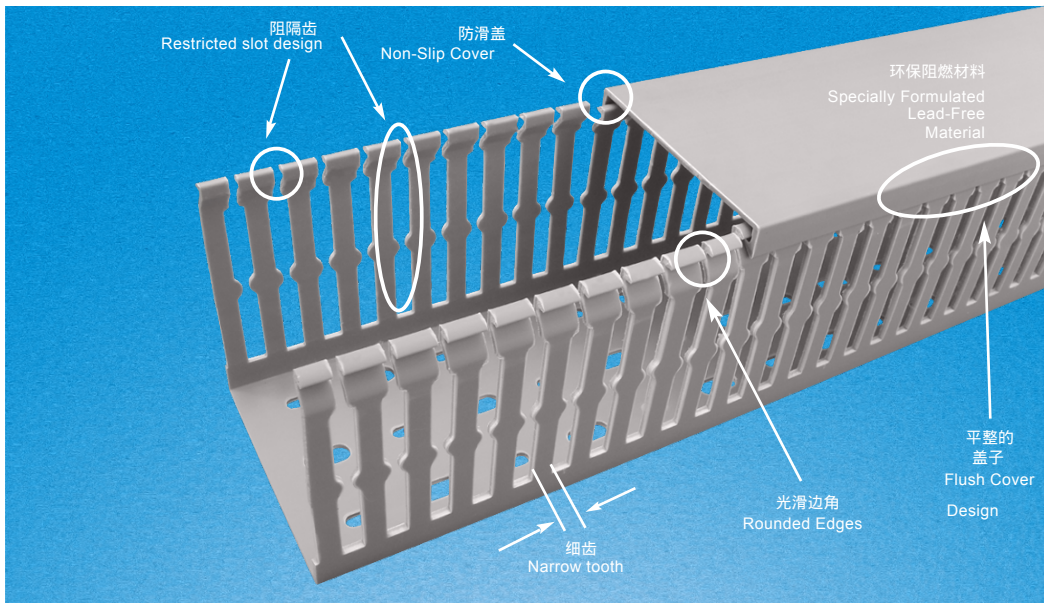

特点/Features	优点/Advantages	益处/Benefits
细的齿和中的孔	较近的电器大一点的接线空间满足高密度排线	允许更多的排线,使布线效果整体美观
环保阻燃材料 Rohs approved Environment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺割伤 Protects hands and wiring/cabing from abrasion
防滑盖 (non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover design Greater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth edge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
阻隔齿设计 Restricted slot design Once inserted wires are retained in the slot	电线装入后不会晃动,不管是否扣盖子 也可用于电线功能不同的分类 with or without the cover being installed	安装时避免线跑出槽不必要的麻烦,节省时间 Eliminates hassle and saves time during installation and maintenance
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers' request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need

